

FEATURE SUMMARY

- ✓ Our largest-capacity rackmount Ethernet recorder featuring **1 x 100GbE** port.
- ✓ Sustained 100% Ethernet capture and record performance at **100Gbps**.
- ✓ Up to **1 Petabyte (SSDs)** of local data storage.
- ✓ Data offload: **USB 3.0** and **10GbE** or optional **25/40/100GbE** ports.
- ✓ **STIG** compliant & **AES256** encryption options.
- ✓ Real-time status monitoring of capture ports.

OPTIONAL DATA PLAYBACK UP TO 100Gbps

MOST SUITABLE FOR THE FOLLOWING APPLICATIONS

Embedded systems



- ✓ RFSoc
- ✓ GPGPU
- ✓ FPGA

Radar



- ✓ phased array radar
- ✓ synthetic aperture radar
- ✓ 3D radar

Wireless comms



- ✓ remote radio
- ✓ 5G baseband
- ✓ μ/mmWave
- ✓ MIMO
- ✓ O-RAN


DESIGNED FOR ANY NETWORK PROTOCOL

- ✓ The **Daqscribe high-speed Ethernet recorder** captures data from **Layer-2** through **Layer-7** of the Ethernet protocol stack.
- ✓ This includes recording **IPV4** or **IPV6** protocols at the network layer and **TCP** or **UDP** protocols at the transport layer.
- ✓ The result is our robust, **network protocol-agnostic** packet recording tool.
- ✓ Data format - compatible with other popular network monitoring tools like **Wireshark**.

Daqscribe high-speed Ethernet recorder

x GbE

100% capture & record from Layer 2

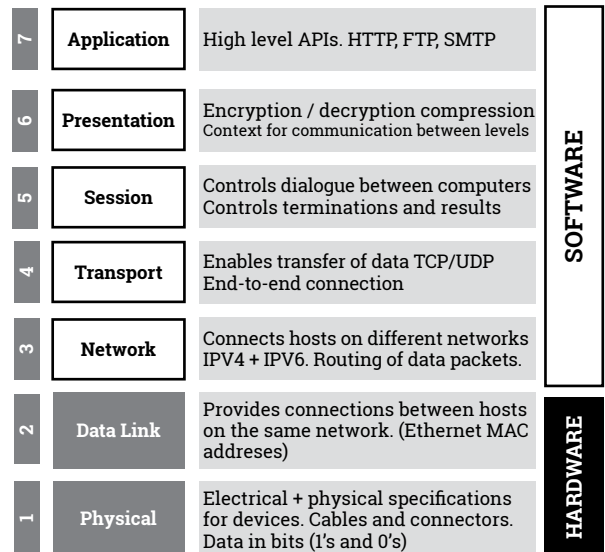

Performance	<ul style="list-style-type: none"> ✓ Line rate Rx 1 x 100Gbps for packet size 61 - 10,000 bytes ✓ Line rate Tx 1 x 100Gbps for packet size 61 - 10,000 bytes ✓ 100% packet capture
Network Interfaces	<ul style="list-style-type: none"> ✓ IEEE 802.3 100GbE Ethernet support ✓ Network interface: 2 x QSFP+ ports, 2 x QSFP28
Supported Optical Transceivers	<ul style="list-style-type: none"> ✓ QSFP+ modules: 40GBASE-SR4/LR4/SR-BiDi/CR4 ✓ QSFP28 modules: 100GBASE-SR4/LR4
Hardware Time Stamp	<ul style="list-style-type: none"> ✓ Resolution: 1 ns, Stratum 3 compliant TCXO ✓ Time formats: PCAP-ns/-µs, UNIX 10 ns, 1 ns
Timing/Synchronization	<ul style="list-style-type: none"> ✓ SMA interface for PPS ✓ RJ45 100/1000BASE-T interface for IEEE1588 PTP support
Data Format	<ul style="list-style-type: none"> ✓ PCAP format (capture/record only) ✓ NTCAP – PCAP style binary format (capture/replay) ✓ CLI utilities: Simple/quick conversion from NTCAP to standard PCAP format or payload extraction
Storage Option	<ul style="list-style-type: none"> ✓ NVMe NAND flash (enterprise) ✓ 1.7PB (1740.8TBW) ✓ Storage in TB with endurance TBW (Total Bytes written in PB) ✓ SSD endurance TBW is based on 128K sequential writing
CPU & Memory	<ul style="list-style-type: none"> ✓ AMD EYPC 16 cores up to 32 cores ✓ System memory from 64GB up to 512GB
Peripherals	<ul style="list-style-type: none"> ✓ Power On/Off switch & LED, Locate switch & LED, NMI switch, 2 x LAN LED ✓ 2 x rear 1GBASE-T, 1 x 1GbE IPMI ✓ 2 x rear USB 3.0 ✓ 1 x rear COM port ✓ Rear VGA display
Data Offload Options	<ul style="list-style-type: none"> ✓ 10G: 2 or 4 x SFP+ 10GBASE-T 40G: 1 or 2 x QSFP+ 100G: 1 or 2 x QSFP28
Temperature	<ul style="list-style-type: none"> ✓ Operating temperature: 0 °C to 35 °C (32 °F to 95 °F) ✓ Operating humidity: 20% to 80%
System Cooling	<ul style="list-style-type: none"> ✓ 5 x 40mm fans with Smart Fan Control
Power Supply	<ul style="list-style-type: none"> ✓ 1+1 850W AC/DC or -48V DC/DC high efficiency redundant power supplies
Dimensions & Weight	<ul style="list-style-type: none"> ✓ H 1.75" (4.5cm) x W 17.2" (43.7cm) x D 27.5" (70cm) ✓ Weight: 50lbs (24kg)
What's Included	<ul style="list-style-type: none"> ✓ 1U chassis rail kit (includes side handles) <p>Display monitor, keyboard and mouse are NOT included.</p>