



FEATURE SUMMARY

- ✓ Our fastest rackmount Ethernet recorder featuring **4 x 25GbE** ports.
- ✓ Sustained 100% Ethernet capture and record performance at **100Gbps**.
- ✓ Up to **180 Terabytes** (SSDs) of local data storage.
- ✓ Data offload: **USB 3.0** and **10GbE** or optional **25/40/100GbE** ports.
- ✓ **STIG** compliant & **AES256** options.
- ✓ Real-time status monitoring of capture ports.

OPTIONAL DATA PLAYBACK UP TO 100Gbps

MOST SUITABLE FOR THE FOLLOWING APPLICATIONS

Wireless comms

- 
- ✓ remote radio
 - ✓ 5G baseband
 - ✓ μ /mmWave
 - ✓ MIMO
 - ✓ O-RAN

Autonomous vehicle


- 
- ✓ LiDAR
 - ✓ IoT (i.e., MIPI® DSI)
 - ✓ test & measurement

Embedded systems

- 
- ✓ RFSoc
 - ✓ GPGPU
 - ✓ FPGA

DESIGNED FOR ANY NETWORK PROTOCOL

- ✓ The DDR7000-R-25G-4 captures data from **Layer-2** through **Layer-7** of the Ethernet protocol stack.
- ✓ This includes recording **IPV4** or **IPV6** protocols at the network layer and **TCP** or **UDP** protocols at the transport layer.
- ✓ The result is our robust, **network protocol-agnostic** packet recording tool.
- ✓ Data format - compatible with other popular network monitoring tools like **Wireshark**.

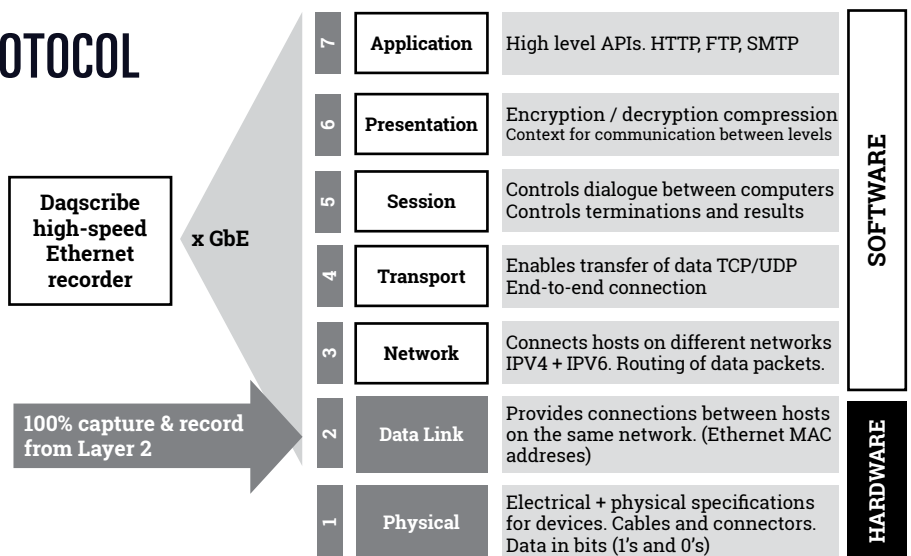

Performance	<ul style="list-style-type: none"> ✓ Line rate Rx 100Gbps (4 x 25Gbps) for packet size 61 - 10,000 bytes ✓ Line rate Tx 100Gbps (4 x 25Gbps) for packet size 61 - 10,000 bytes ✓ 100% packet capture
Network Interfaces	<ul style="list-style-type: none"> ✓ IEEE 802.3 25GbE Ethernet support ✓ Network interface: 1 x QSFP28 port or 4 x SFP28 ✓ QSFP28 modules: 4 x SFP28 CR/SR breakout from QSFP28 ✓ SFP28 modules: 25GBASE-CR/SR/LR/LR-BiDi, dual-rate 10/25GBASE-SR/LR
Hardware Time Stamp	<ul style="list-style-type: none"> ✓ Resolution: 1 ns, Stratum 3 compliant TCXO ✓ Time formats: PCAP-ns/-µs, UNIX 1 ns
Timing/Synchronization	<ul style="list-style-type: none"> ✓ SMA interface for PPS ✓ RJ45 100/1000BASE-T interface for IEEE1588 PTP support ✓ OS time synchronization
Data Format	<ul style="list-style-type: none"> ✓ PCAP format (capture/record only) ✓ NTCAP – PCAP style binary format (capture/replay) ✓ Command-line-interface utilities: Simple/quick conversion from NTCAP to standard PCAP format or payload extraction
Optional Capture /Record In-Line Features (FPGA Processing)	<ul style="list-style-type: none"> ✓ Filtering based on e.g. L3/L4 criteria ✓ GTP, IP-in-IP, GRE and NVGRE tunneling support ✓ IP fragment handling ✓ Slicing at fixed or dynamic offset
Storage Options	<ul style="list-style-type: none"> ✓ NVMe NAND flash (enterprise) ✓ 25TB (149TBW), 50TB (298TBW), 120TB (269TBW), 180TB (403TBW) ✓ Storage in TB with endurance TBW (Total Bytes written in PB) ✓ SSD endurance TBW is based on 128K sequential writing
CPU & Memory	<ul style="list-style-type: none"> ✓ Intel Xeon scalable dual socket CPUs ✓ System memory from 64GB up to 2TB
Peripherals	<ul style="list-style-type: none"> ✓ Power On/Off switch & LED, Locate switch & LED, NMI switch, 2 x LAN LED ✓ 2 x rear 10GBASE-T, 1 x 1GbE IPMI ✓ 2 x rear USB3.0 ✓ 1 x rear COM port ✓ rear VGA/DVI/HDMI display
Data Offload Options	<ul style="list-style-type: none"> ✓ 10G: 2 or 4 x SFP+ 10GBASE-T 40G: 1 or 2 x QSFP+ 100G: 1 or 2 x QSFP28
Temperature	<ul style="list-style-type: none"> ✓ Operating temperature: 0°C to 35°C (32°F to 95°F) ✓ Operating humidity: 20% to 80%
System Cooling	<ul style="list-style-type: none"> ✓ 92mm, 2 x 80mm fans with Smart Fan Control ✓ Front bezel with removable air filter
Power Supply	<ul style="list-style-type: none"> ✓ 865W high efficiency power supply
Dimensions & Weight	<ul style="list-style-type: none"> ✓ H 7" (17.8cm) x W 17.2"(43.7cm) x D 20.5" (52.1cm) ✓ Weight: 50lbs (24kg)
What's Included	<ul style="list-style-type: none"> ✓ 4U chassis rail kit (includes side handles) <p>Display monitor, keyboard and mouse are NOT included.</p>